




G 10000 V

Voltage (V): 230

Frequency (Hz): 50

STATIONARY WITHOUT CANOPY

KEY START

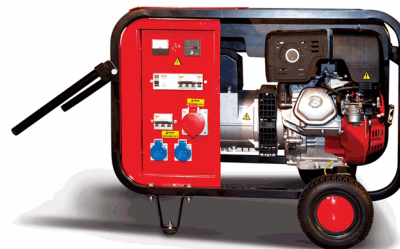

Technical Data Sheet

Technical information


PRP Power (kVA)	9,63
PRP Power (kW)	8
Model	STATIONARY WITHOUT CANOPY

Weight and Dimensions (mm)

Length (L)	900
Width (A)	520
Height (H)	550
Weight (kg)	95
Fuel tank capacity (l)	15

Noise Level

Acoustic pressure [LpA] (dBA)	77
Acoustic power [LwA] (dBA)	97

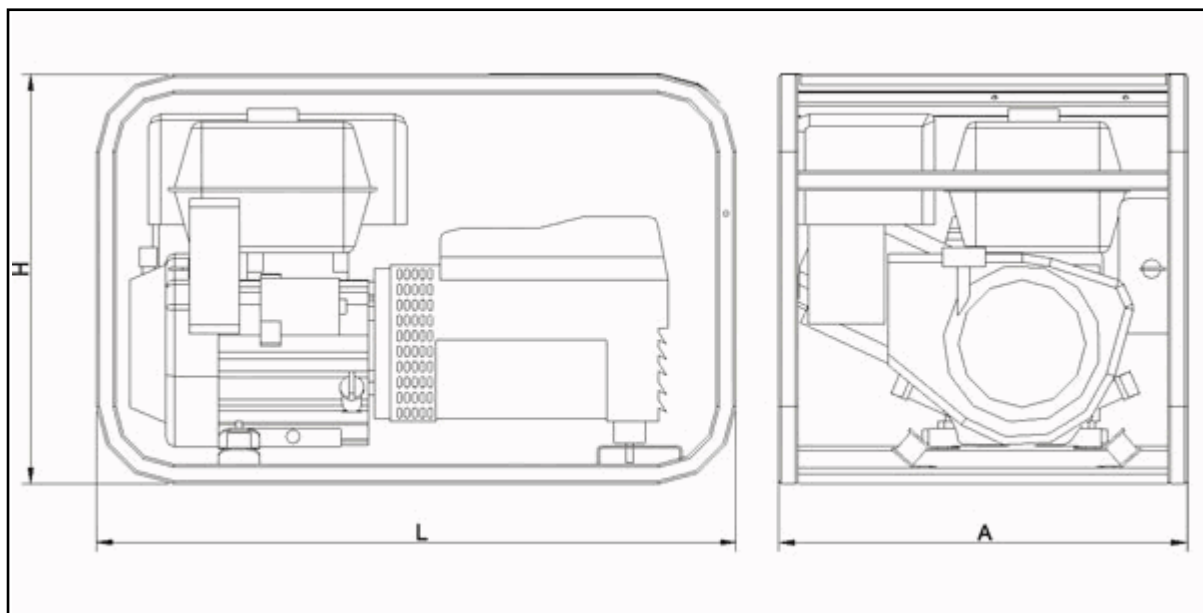

Consumption

	PRP Power		Standby Power	
	L/h	Range (hours)	L/h	Range (hours)
25%	0	0	0	0
50%	0	0	0	0
75%	3,5	4,3	3,5	4,3
100%	4,67	3,2	4,67	3,2

Engine

Brand	VANGUARD
Model	305447-0116
No. of cylinders	2
Engine Capacity (c.c.)	570
Bore (mm)	72
Stroke (mm)	70
Compression ratio	8:1
Air cooled	✓
Speed (r.p.m.)	3000
Power (HP)	14,9

Lubrication System

Oil sump capacity (l)	1,7
-----------------------	-----

Electrical system

Number of batteries	1
Battery	12V 46 Ah.

Alternator

Model	S20F-200/A
Power (kVA)	9,63

Head office address:

Pol. Indl Malpica-Alfinden. C/Encina 8
50171 La Puebla de Alfindén (Zaragoza) España
Tfno: +34 976 107 332 Fax: +34 976 107 366
info@gesan.com www.gesan.com

Grupos Electrógenos Gesan reserves the right to modify any characteristic without prior notice. Photos based on product standards, being possible to add optional elements.