



GS 210 DC H

Voltage (V): 400/230
 Frequency (Hz): 50
MOBILE
KEY START



Technical Data Sheet

Technical information

Welder

| | |
|-------------------------|-----------|
| Power (A) | 210 |
| Welding current type | DC |
| Amps welding 35% (A) | 220 |
| Amps welding 65% (A) | 170 |
| Strive voltage (V) | 73 |
| Welding voltage (V) | 21,6-28,8 |
| Electrode Diameter (mm) | 4,5 |
| Driven Power (CV) | 15 |
| Rutile electrode | ✓ |
| Basic electrode | ✓ |
| Cellulose electrode | ✓ |

Genset


| | |
|-----------------------------------|-----|
| Electric power 3-phase (kVA) | 6,5 |
| Electric power single phase (kVA) | 3,5 |

Weight and Dimensions (mm)

| | |
|-------------|-----|
| Length (L) | 860 |
| Width (A) | 690 |
| Height (H) | 650 |
| Weight (kg) | 82 |

Noise Level


| | |
|-------------------------------|----|
| Acoustic pressure [LpA] (dBA) | 77 |
| Acoustic power [LwA] (dBA) | 97 |

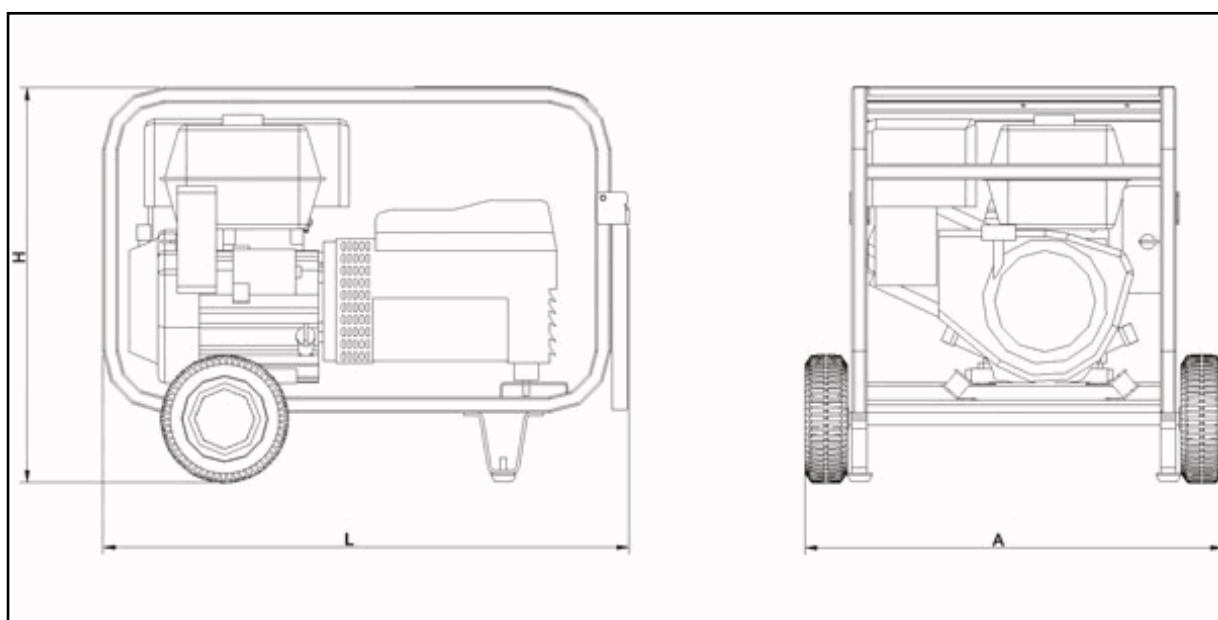

Consumption

| | PRP Power | | Standby Power | |
|------|-----------|---------------|---------------|---------------|
| | L/h | Range (hours) | L/h | Range (hours) |
| 25% | 0 | 0 | 0 | 0 |
| 50% | 0 | 0 | 0 | 0 |
| 75% | 1,8 | 3,6 | 1,8 | 3,6 |
| 100% | 2,4 | 2,7 | 2,4 | 2,7 |

Engine

| | |
|------------------------|---|
| Brand | HONDA |
| Model | GX 390 |
| No. of cylinders | 1 |
| Engine Capacity (c.c.) | 389 |
| Bore (mm) | 88 |
| Stroke (mm) | 64 |
| Compression ratio | 8:1 |
| Air cooled |  |
| Speed (r.p.m.) | 3000 |
| Max. Power | 11,2 |
| Fuel tank capacity (l) | 6,5 |

Lubrication System

| | |
|-----------------------|------------|
| Oil sump capacity (l) | 1,1 |
|-----------------------|------------|

Electrical system

| | |
|-----------|------------------|
| Batería/s | 12V 7 Ah. |
|-----------|------------------|

Alternator

| | |
|-------|----------------|
| Model | EW220DC |
|-------|----------------|

Head office address:

Pol. Indl Malpica-Alfinden. C/Encina 8
50171 La Puebla de Alfindén (Zaragoza) España
Tfno: +34 976 107 332 Fax: +34 976 107 366
info@gesan.com www.gesan.com

Grupos Electrógenos Gesan reserves the right to modify any characteristic without prior notice. Photos based on product standards, being possible to add optional elements.